


P14 / P14STP Exit Device

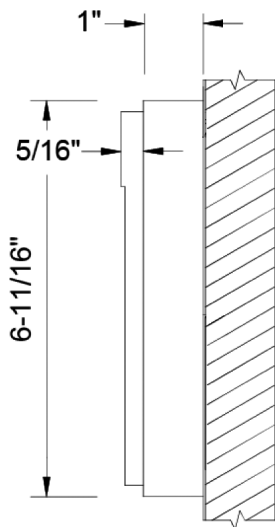

SPECIFICATIONS

| | |
|---------------------------------------|---|
| Lengths | <ul style="list-style-type: none"> • Standard 24" – P14STP • Full door width – P14 (custom) |
| Height | <ul style="list-style-type: none"> • 6-11/16" |
| Projection | <ul style="list-style-type: none"> • 1-5/16" |
| Centerline from bottom of door | <ul style="list-style-type: none"> • 39-9/16" Standard Height • 34-9/16" Elementary Height |
| Finishes | <ul style="list-style-type: none"> • 628 Satin Anodized Aluminum • 710 Dark Bronze Anodized • Insert to match door body or custom finish • Architectural metal inserts: 629, 630, 707, 667, 710 |
| Dogging Options | <ul style="list-style-type: none"> • Mechanical • Electric – E-UNL |

Exit Devices

- ADA compliant
- Fire rated up to 3 hours
- Limited lifetime warranty
- Available with levers, operating grips or exit only
- All electrical functions available
- Factory installed as an integral part of the Total Door system
- Cycle tested to over 5 million cycles versus 500 thousand required by BHMA and ANSI standards for exit devices