


SP14 Push Pad

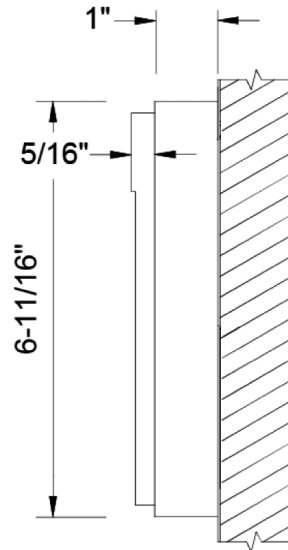

SPECIFICATIONS

Lengths	<ul style="list-style-type: none"> • Lengths 6-11/16" – standard • 9" – electric functions
Height	<ul style="list-style-type: none"> • 6-11/16"
Projection	<ul style="list-style-type: none"> • 1-5/16"
Centerline from bottom of door	<ul style="list-style-type: none"> • 39-9/16" Standard Height • 34-9/16" Elementary Height
Finishes	<ul style="list-style-type: none"> • 628 Satin Anodized Aluminum • 710 Dark Bronze Anodized • Insert to match door body or custom finish • Architectural metal inserts: 629, 630, 707, 667, 710
Dogging Options	<ul style="list-style-type: none"> • Mechanical • Electric – E-UNL

Push Pad

- ADA compliant
- Fire rated up to 3 hours
- Limited lifetime warranty
- Available with levers, operating grips or exit only
- All electrical functions available – Electric Unlatching, Fail Safe, Electric Panic
- Factory installed as an integral part of the Total Door system
- Cycle tested to over 5 million cycles versus 500 thousand required by BHMA and ANSI standards for exit devices